

Cover Letter

We are looking forward to providing you with an industry-leading technology, professional services, and local expertise that will help achieve your organization's goals and intended strategy.

Continuing its trend of delivering high quality and complete high quality systems, Jordan Automation is committed to make any and all of its projects examples of service excellence in Jordan.

In the meantime, we hope our proposal would meet your minimum requirements; however, we will always be glad to meet with you to discuss our offer in further details.

Proposal is prepared by:

Hamzeh Hanouti
Operations Manager
Tel: +962 6 474 474 9
Cell. +962 7 990 110 60
Email: Info@jordan-automation.com
Website: www.jordan-automation.com

We thank you for your consideration of this proposal and look forward to hearing from you soon.

Best Regards,

الأردنية للتصنيع الآلي
نحن نقود نحن ننجز

®


JOCAM

Jordan Automation

We Lead We Achieve

Laser Cutting Machine

SINGLE table with NO cover

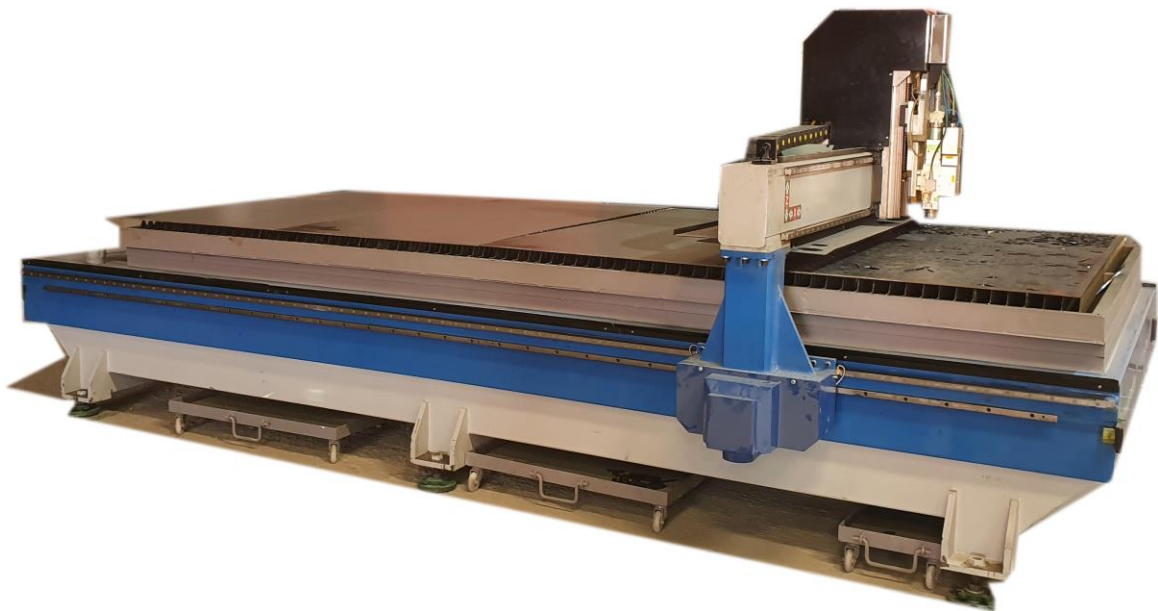

Hypertherm

KMT

IPG
PHOTONICS

Roland

Al Sakhra Al Musharafa Street - M. Abu Khamseh Complex
Telefax : +962 6 4744749/5 - P.O.Box 923218 Amman 11192 Jordan

Jeddah -King Abd Al-Aziz Street - Queen Building - Office 803
Telefax : +966 12 643 2425 - P.O.Box 34894 Jeddah 21478 KSA

Email: info@jordan-automation.com - Website: www.jordan-automation.com  @JOCAM.Ltd

Machine parts information

Machine parts list			
No	Item	Brand	Note
1	Machine cutting table	4020 Single table	China
2	Laser power	Raycus 2KW	China
3	Laser head	BM111	Switzerland
4	Chiller	HANLI	China
5	CNC controller	Cypcut	China
6	Auto height controller	BCS100	China
7	Gear rack	APEX	Taiwan
8	Rail guide	HIWIN	Taiwan
9	X/Y axis Servo	Yaskawa 0.85kw	Japan
10	Z axis servo	Yaskawa	Japan
11	Planetary Gearbox	Shimpo	Japan
12	Proportional valve	SMC	Japan
13	Pressure valve	SMC	Japan
14	Relay	Schneider	France

Machine specification

Item		Specification
Effective stroke	X axis(mm)	4010
	Y axis(mm)	2010
	Z axis(mm)	100
Position accuracy	X axis(mm/m)	±0.03
	Y axis(mm/m)	±0.03
	Z axis(mm/m)	±0.01
Repeated accuracy	X axis(mm)	±0.02
	Y axis(mm)	±0.02
	Z axis(mm)	±0.005
Max position speed(m/min)		100m/min
Acceleration (G)		0.6G--1.0G
Protection level		IP54
Machine weight (Ton)		3.5

Terms & Conditions

التركيب والتجميع

- ❖ العميل مسؤول عن توفير ادوات التركيب من رافعات شوكية وما يتطلبه التركيب
- ❖ العميل مسؤول عن توفير كهرباء مناسبة للماكينة (380 فولت)
- ❖ العميل مسؤول عن توفير وتوصيل ارضي للماكينة بشكل ممتاز
- ❖ العميل مسؤول عن توفير الغازات المطلوبة للماكينة بالضغطات الصحيحة
- ❖ العميل مسؤول عن توفير مكان نظيف وحرارة مناسبة لعمل الماكينة
- ❖ العميل مسؤول عن توفير مساحة 5.5×2.5 متر كحد ادنى بحرارة 20 درجة مئوية

Warranty

- ❖ According to our warranty conditions 12 months parts and labour and doesn't include Consumables.

Hope that our offer will be up to your satisfactory

If you have any questions or requirements, please let me know at any time. It will be our big pleasure if we have opportunities to be on service of you in near future.

vice of you in near future.